

| Allowable U lbs (kN) ^{A,B,C,D} | | | | |
|---|----------------------------------|-----------------------|----------------------------------|-----------------------|
| Concrete Strength f'c, psi (MPa) | TSC2.75 | | TSC3.00 or TSC4.00 | |
| | Clip on one face ^E | Clip on both faces | Clip on one face ^E | Clip on both faces |
| 2500 (17.24) | 400 (1.78) | 780 (3.47) | 660 (2.94) | 1560 (6.94) |
| 3000 (20.68) | 400 (1.78) | 860 (3.83) | 720 (3.20) | 1710 (7.61) |
| 4000 (27.58) | 400 (1.78) | 990 (4.40) | 830 (3.69) | 1980 (8.81) |
| 5000 (34.47) | 400 (1.78) | 1110 (4.94) | 930 (4.14) | 2220 (9.88) |
| Allowable P1 & P2 lbs (kN) ^{A,B,C,D} | | | | |
| Chord | P1 | | P2 | |
| | Clip on one face ^D | Clip on both faces | Clip on one face ^D | Clip on both faces |
| TSC2.75 | 580 (2.58) | 870 (3.87) | 730 (3.25) | 870 (3.87) |
| TSC3.00 or TSC4.00 | 580 (2.58) | 1160 (5.16) | 730 (3.25) | 1160 (5.16) |

- A. Allowable loads shown on this detail are not in combination.
- B. Special inspection is required. Refer to ICC ESR-2202 (May 1, 2009) regarding proper installation of anchors and requirements for special inspection.
- C. Per ICC ESR-2202 (May 1, 2009), the design values given above are for uncracked concrete only.
- D. Allowable loads outlined are based on the assumption that 70% of the applied load is live load and 30% is dead load.
- E. Uplift connections with clip on one face require web above connection.

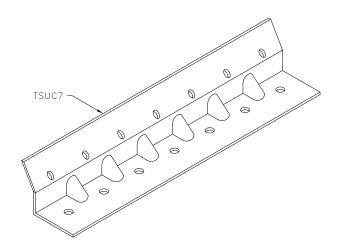

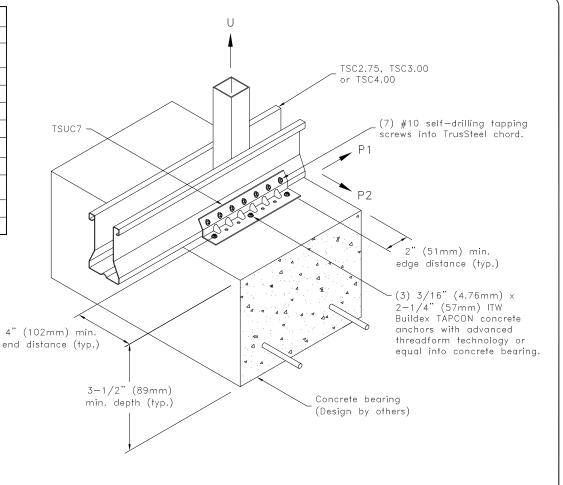

General Notes:

- 1. This detail shall not be used to resist seismic loads.
- 2. Attachment of second clip on opposite face of chord is identical to what is detailed.
- 3. Fill outside holes and middle hole of TSUC7 clip with TAPCON concrete anchors as shown..
- 4. Concrete anchor is not to be installed until concrete has reached the specified design strength.
- 5. Design of tapcons are per ICC ESR-2202 (May 1, 2009).
- Cold—Formed Steel Calculations are per the 2010 supplement to the AISI 2007 "North American Specifications for the Design of Cold—Formed Steel Structural Members" (\$100-07/\$2-10).



www.TrusSteel.com

Florida: 1950 Marley Drive / Haines City, FL 33844 / (800) 755-6001 Missouri: 13389 Lakefront Drive / Earth City, MO 63045 / (800) 326-4102

TSUC7 Uplift Attachment To Concrete Bearing

ITW Building Components Group, Inc. shall not be responsible for any performance failure in a connection due to a deviation from this detail. Any variation from this detail shall be approved in advance by ITW Building Components Group, Inc.

Standard Detall:

TS043

Date:

07/16/12

TrusSteel Detail Category:

Truss-To-Bearing: Concrete