




## TOP CHORD PITCH BREAKS

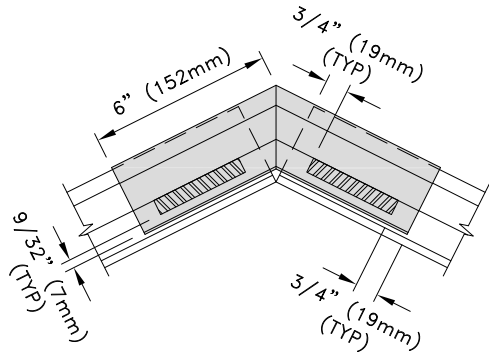

Fasteners Through The Flat Chord Area

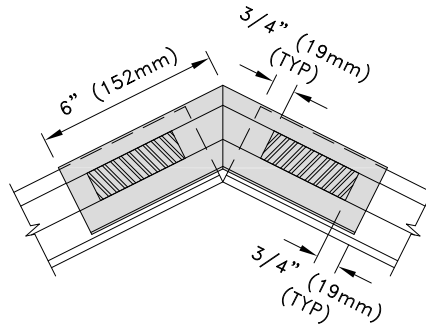


Fasteners Through The Slanted Chord Area

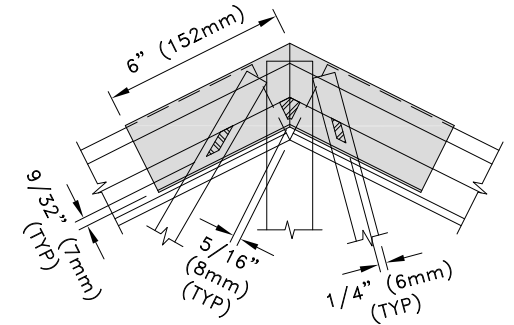


Fasteners Through The Web Area


## BOTTOM CHORD PITCH BREAKS

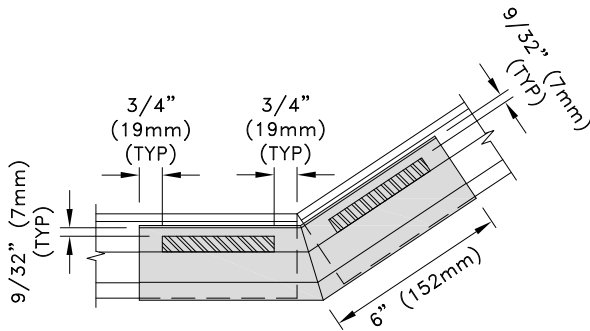


Fasteners Through The Flat Chord Area

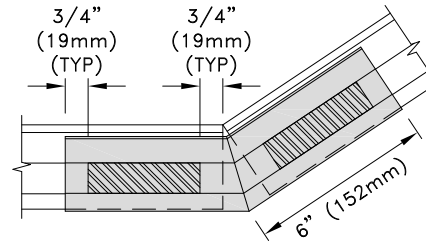


Fasteners Through The Slanted Chord Area

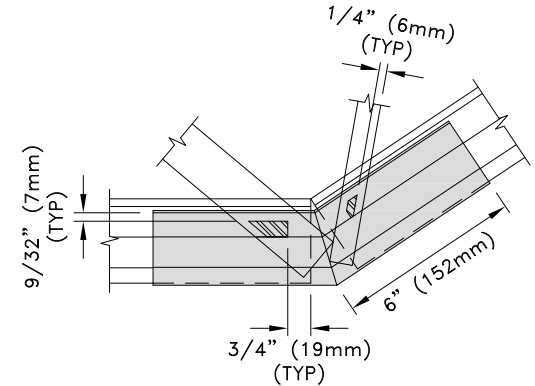

Fasteners Through The Web Area

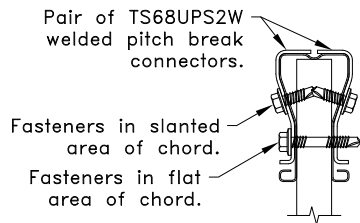

Section View  
Top Chord Pitch Break

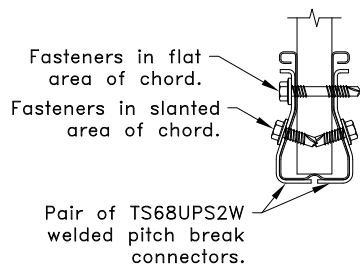

Section View  
Bottom Chord Pitch Break

General Notes:

1. Fastener spacing and end distance is 3/4" (19mm) minimum, except as shown.
2. Refer to approved truss drawings for required fastener type and quantities for each fastener contact area.
3. Fastener contact areas that coincide with other contact areas may use a common fastener for both areas. This will result in a reduction in the total number of fasteners required at the pitch break joint.
4. = Fastener contact area.



[www.TrusSteel.com](http://www.TrusSteel.com)

Florida: 6750 Forum Drive, Suite 305 / Orlando, FL 32821 / (800) 755-6001  
Missouri: 13723 Riverport Drive, Suite 200 / Maryland Heights, MO 63043 / (800) 326-4102

### TSC2.75 Welded Pitch Break Connector Fastener Areas

Alpine, a division of ITW Building Components Group, Inc. shall not be responsible for any performance failure in a connection due to a deviation from this detail. Any variation from this detail shall be approved in advance by Alpine, a division of ITW Building Components Group, Inc.

**Standard Detail:**  
TS004C

**Date:**  
10/11/18

**TrusSteel Detail Category:**  
Pitch Break Connections