


Allowable Loads lbs (kN) ^A						
Chord	Clip on one face ^B					
	#10SDS into bottom chord			#12SDS into bottom chord		
	U	P1	P2	U	P1	P2
28TSC2.75		620 (2.76)	310 (1.38)		660 (2.94)	
33TSC2.75	400 (1.78)	770 (3.43)	340 (1.51)	400 (1.78)	820 (3.65)	
43TSC2.75		1140 (5.07)			1220 (5.43)	
28TSC3.00 or 28TSC4.00		620 (2.76)	310 (1.38)		660 (2.94)	340 (1.51)
33TSC3.00 or 33TSC4.00		770 (3.43)			820 (3.65)	
43TSC3.00 or 43TSC4.00	740 (3.29)	1140 (5.07)	340 (1.51)	740 (3.29)	1220 (5.43)	
54TSC3.00 or 54, 68 & 97TSC4.00		1310 (5.83)			1490 (6.63)	
Chord	Clip on both faces					
	#10SDS into bottom chord			#12SDS into bottom chord		
	U	P1	P2	U	P1	P2
28TSC2.75		1230 (5.47)	630 (2.80)		1310 (5.83)	710 (3.16)
33TSC2.75		1530 (6.81)	730 (3.25)		1630 (7.25)	830 (3.69)
43TSC2.75		1960 (8.72)	2280 (10.14)	880 (3.91)	1960 (8.72)	2430 (10.81)
28TSC3.00 or 28TSC4.00		1230 (5.47)	630 (2.80)		1310 (5.83)	710 (3.16)
33TSC3.00 or 33TSC4.00		1530 (6.81)	730 (3.25)		1630 (7.25)	830 (3.69)
43TSC3.00 or 43TSC4.00	1960 (8.72)	2280 (10.14)	880 (3.91)	1960 (8.72)	2430 (10.81)	880 (3.91)
54TSC3.00 or 54, 68 & 97TSC4.00		2620 (11.65)			2970 (13.21)	

A. Allowable loads shown are not in combination.
B. Uplift connections with clip on one face require web above connection.

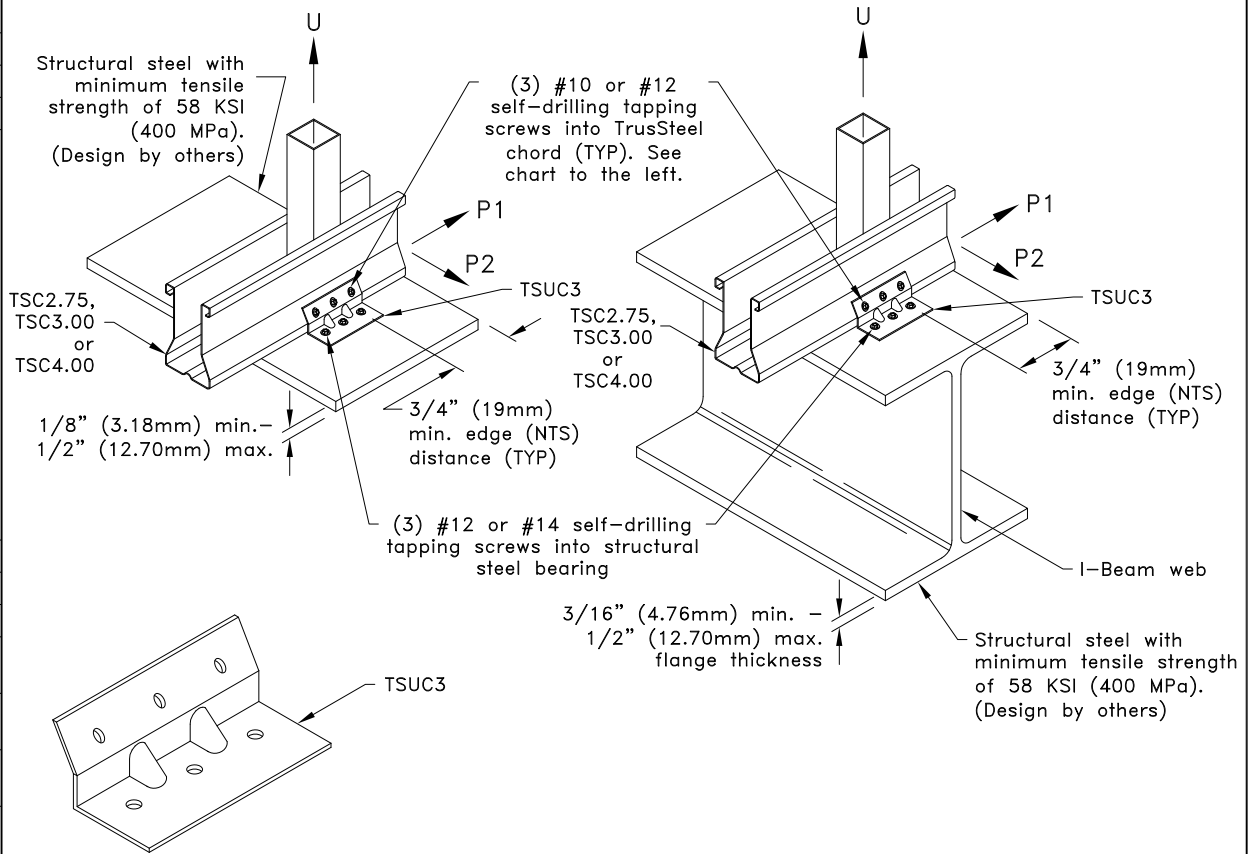

General Notes:

1. If a clip is required on both faces, attach the second clip to the opposite face of the chord as detailed.
2. Multi-ply trusses require a clip on each face. Refer to TrusSteel detail drawing TS023A for ply-to-ply connections for 3-Ply trusses with a clip on each face.
3. Do not overdrive screws. Overdriven screws may strip out TrusSteel chord.
4. Do not drive screws into area of beam flange directly above beam web.
5. To select proper self-drilling tapping screw for structural steel thickness refer to screw manufacturer's recommendations. Refer to manufacturer's specification and code approval regarding proper installation of #12 or #14 self-drilling tapping screws into steel thickness shown above.
6. Cold-Formed Steel Calculations are per the AISI 2016 "North American Specifications for the Design of Cold-Formed Steel Structural Members" (S100-16).



Florida: 6750 Forum Drive, Suite 305 / Orlando, FL 32821 / (800) 755-6001
Missouri: 13723 Riverport Drive, Suite 200 / Maryland Heights, MO 63043 / (800) 326-4102

TSUC3 Attachment To Structural Steel Bearing Using Screws

Alpine, a division of ITW Building Components Group, Inc. shall not be responsible for any performance failure in a connection due to a deviation from this detail. Any variation from this detail shall be approved in advance by Alpine, a division of ITW Building Components Group, Inc.

Standard Detail:

TS047

Date:

10/11/18

TrusSteel Detail Category:

Truss-To-Bearing: Structural Steel