


IMPERIAL WEB VALUES

SECTION NAME	GAUGE	DESIGN THICKNESS (in)	F _y (ksi)	F _u (ksi)	FULL SECTION PROPERTIES					FULLY BRACED ALLOWABLES			
					A _g (in ²)	I _x (in ⁴)	S _x (in ³)	I _y (in ⁴)	S _y (in ³)	T _a (lbs.)	P _a (lbs.)	Max (in-lbs.)	Wt (lbs./ft.)
33W.75x.75	20	0.0350	45	55	0.0948	0.0078	0.0208	0.0078	0.0208	2,556	2,371	562	0.322
33W.75x1.5	20	0.0350	45	55	0.1473	0.0423	0.0564	0.0145	0.0388	3,970	3,541	1,519	0.501
33W.75x2.5	20	0.0350	45	55	0.1998	0.1182	0.1051	0.0213	0.0567	5,385	3,860	2,831	0.679

METRIC WEB VALUES

SECTION NAME	GAUGE	DESIGN THICKNESS (mm)	F _y (MPa)	F _u (MPa)	FULL SECTION PROPERTIES					FULLY BRACED ALLOWABLES			
					A _g (mm ²)	I _x (mm ⁴)	S _x (mm ³)	I _y (mm ⁴)	S _y (mm ³)	T _a (kN)	P _a (kN)	Max (kN-mm)	Wt (kN/m)
33W.75x.75	20	0.8890	310	379	61	3,247	341	3,247	341	11.37	10.55	63.5	0.005
33W.75x1.5	20	0.8890	310	379	95	17,607	924	6,035	636	17.66	15.75	171.6	0.007
33W.75x2.5	20	0.8890	310	379	129	49,199	1722	8,866	929	23.95	17.17	319.9	0.010

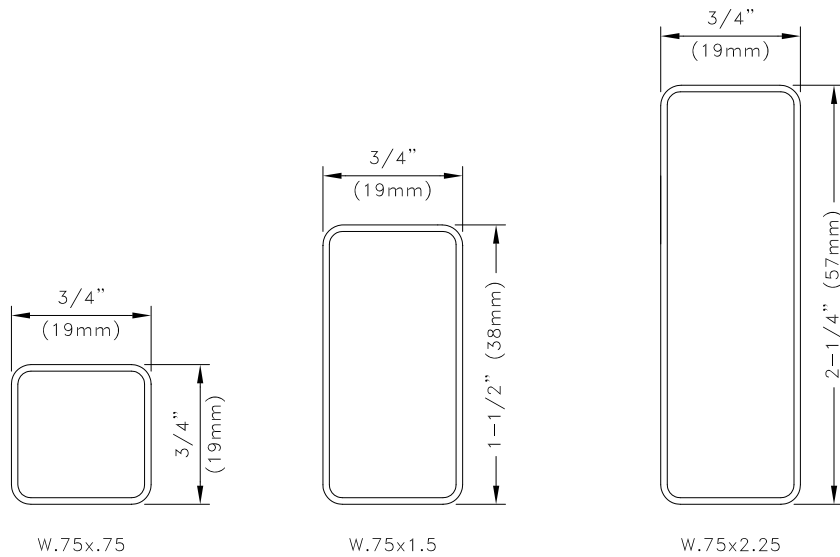

General Notes:

1. All tubes to conform to ASTM A500 with G60 minimum galvanization or equal. Bare metal thickness is 95% of design thickness.
2. Properties determined according to the 2010 supplement to the AISI 2007 "North American Specifications for the Design of Cold-Formed Steel Structural Members" (S100-07/S2-10).
3. T_a = Allowable Tension, P_a = Allowable Compression, Max = Allowable Moment, Wt = Weight
4. The allowable values given in this table do not reflect any strength increase due to cold work of forming.

TrusSteel[®]

www.TrusSteel.com

Florida: 1950 Marley Drive / Haines City, FL 33844 / (800) 755-6001
 Missouri: 13389 Lakefront Drive / Earth City, MO 63045 / (800) 326-4102

TSC2.75 Tube
Web Properties

ITW Building Components Group, Inc. shall not be responsible for any performance failure in a connection due to a deviation from this detail. Any variation from this detail shall be approved in advance by ITW Building Components Group, Inc.

Standard Detail:

TS009

Date:

07/16/12

TrusSteel Detail Category:

Member Section Properties